

Surface Mounting & Pcmcia Transformer

SPECIFICATIONS : **V.34**

ELECTRICAL :

IMPEDANCE : PRI. & SEC.= 600 OHMS EACH (REF.)

DESIGNED TO REFLECT : 600 OHMS \pm 5% ON PRI. WITH
294 OHMS LOAD ON SEC. @ 1KHz, 1Vrms

D.C. RESISTANCE : PRI. = 156 OHMS \pm 10% @ 20°C
SEC. = 145 OHMS \pm 10% @ 20°C

TURN RATIO : (PRI. : SEC.) = 1 : 1 \pm 2%

D.C. CURRENT : NONE

INDUCTANCE : 8 H MIN. @ 300Hz, 1Vrms ON PARALLEL

INSERTION LOSS : 3.75 dB MAX. @ 1KHz, 20°C

FREQUENCY RESPONSE : \pm 0.25 dB @ 300Hz - 3.5KHz



RETURN LOSS : 25 dB MIN. @ 300Hz - 3.5KHz

TOTAL HARMONIC DISTORTION : -82 dB MAX. @ 600Hz, -10dBm


LONGITUDINAL BALANCE : 60 dB MIN. @ 60Hz - 1KHz

40 dB MIN. @ 1KHz - 4KHz


HI-POT TEST : 1.25 KVAC MIN. BETWEEN PRI. & SEC. 1mA FOR 2 SECONDS

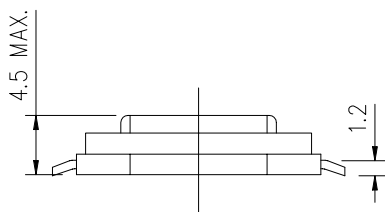

SCHEMATIC



TOP VIEW

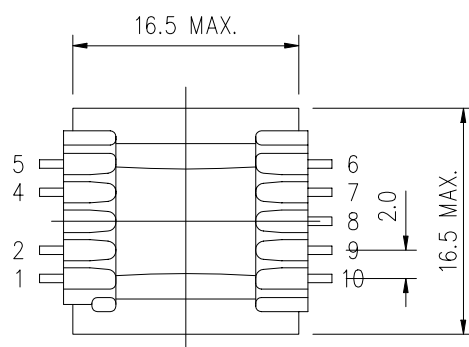

BOTTOM VIEW

SPEC LIN ENTERPRISE CO. LTD.

2F, No. 6, ALLEY 17, LANE 42, CHUNG HSING N. ST.
SAN CHUNG CITY, TAIPEI, TAIWAN
TEL: 886-2-29991394 FAX: 886-2-22781629

AGENCY NO.

UL NO. : E181559

CSA NO. : LR107869

ISO 9002: 036809750

DRAWING NO.

611212

UNITS
mm

SHEET
1 OF 1

