

Surface Mounting & Pcmcia Transformer

SPECIFICATIONS : 56 Kbps

ELECTRICAL :

IMPEDANCE : PRI. & SEC = 600 OHMS EACH (REF.)

DESIGNED TO REFLECT : 600 OHMS \pm 5% ON PRI. WITH
290 OHMS LOAD ON SEC. @ 1KHz, 1Vrms

D.C. RESISTANCE : PRI. = 165 OHMS \pm 10% @ 20°C

SEC. = 200 OHMS \pm 10%

TURN RATIO : (PRI. : SEC.) = 1 : 1 \pm 2%

D.C. CURRENT : NONE

INSERTION LOSS : 2.9 dB MAX. @ 1KHz



FREQUENCY RESPONSE : \pm 0.1 dB @ 200Hz - 5KHz

RETURN LOSS : 30 dB MIN. @ 300Hz - 3.5KHz


TOTAL HARMONIC DISTORTION : -85 dB MAX. @ 600Hz, -10dBm

LONGITUDINAL BALANCE : 60 dB MIN. @ 300Hz - 3.5KHz


HI-POT TEST : 1.25 KVAC MIN. BETWEEN PRI. & SEC. 1mA FOR 2 SECONDS

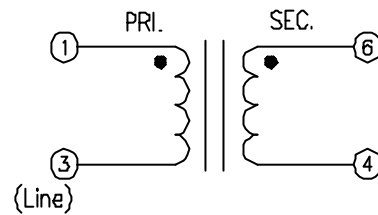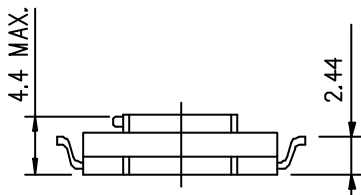

SCHEMATIC

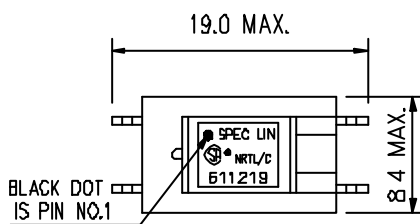

TOP VIEW

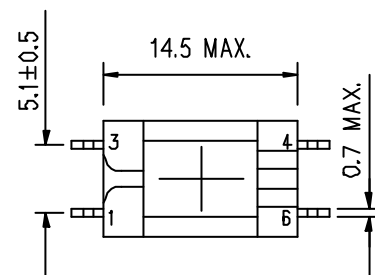

BOTTOM VIEW

SPEC LIN ENTERPRISE CO. LTD.

2F.No.6,ALLEY 17,LANE 42,CHUNG HSING N.ST.
SAN CHUNG CITY,TAIPEI,TAIWAN
TEL: 886-2-29991394 FAX: 886-2-22781629

AGENCY NO.

UL NO. : E181559

CSA NO. : LR107869

ISO 9002: 036809750

DRAWING NO.

611219

UNITS
mm

SHEET
1 OF 1

