

Surface Mounting & Pcmcia Transformer

SPECIFICATIONS : **56 Kbps**

ELECTRICAL :

IMPEDANCE : PRI. & SEC.= 600 OHMS EACH (REF.)

DESIGNED TO REFLECT : 600 OHMS \pm 3% ON PRI. WITH
280 OHMS LOAD ON SEC. @ 1KHz, 1Vrms

D.C. RESISTANCE : PRI. = 170 OHMS \pm 10% @ 20°C
SEC. = 160 OHMS \pm 10%

TURN RATIO : (PRI. : SEC.) = 1 : 1 \pm 2%

D.C. CURRENT : NONE

INDUCTANCE : 1.5 H MIN. @ 1KHz, 1Vrms ON SERIES




INSERTION LOSS : 3.2dB MAX. @ 1KHz, 1Vrms

FREQUENCY RESPONSE : \pm 0.1 dB @ 200Hz - 4KHz


RETURN LOSS : 30 dB MIN. @ 300Hz - 3.5KHz

TOTAL HARMONIC DISTORTION : -80 dB MAX. @ 600Hz, -10dBm

HI-POT TEST : 1.5 KVAC MIN. BETWEEN PRI. & SEC. 1mA FOR 1 SECONDS

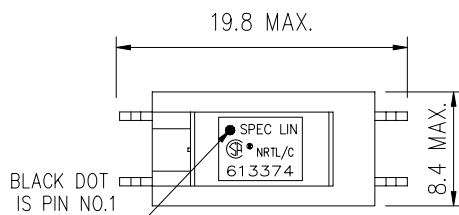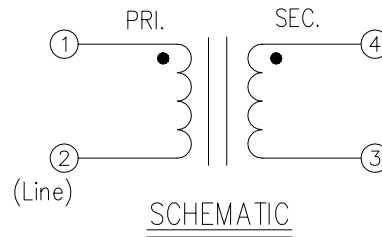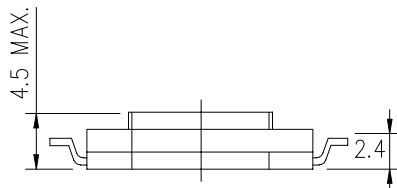

TOP VIEW

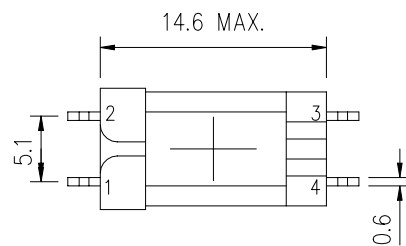

BOTTOM VIEW

CHECKUP : _____

DESIGN : _____

DRAWEE : _____

SPEC LIN ENTERPRISE CO. LTD.

2F, No.6, ALLEY 17, LANE 42, CHUNG HSING N.S.T.
SAN CHUNG CITY, TAIPEI, TAIWAN
TEL: 886-2-29991394 FAX: 886-2-22781629

AGENCY NO.

UL NO. : E181559

CSA NO. : LR107869

ISO 9002 : 036809750

DRAWING NO.

613374

UNITS
mm

SHEET
1 OF 1

