

Low Profile Modem Transformer

Designed to reflect 600 ohms on PRI with 374 ohm load on SEC.

Longitudinal Balance :

60dB minimum, 200Hz to 1000Hz

40dB minimum, 1 kHz to 4kHz

D.C. RESISTANCE : PRI. = 108 OHMS \pm 10% @ 20°C

SEC. = 120 OHMS \pm 10%

FREQUENCY RESPONSE : \pm 0.25 dB @ 200Hz - 4KHz





INSERTION LOSS : 2.0 \pm 0.25dB , at 1000Hz

D.C.Current : None

Return loss :30dB typ., at 1 KHz

Turns Ratio (PRI : SEC) : 1 : 1 \pm 2%

HI-POT TEST : 1.25VAC, PRI. - SEC.

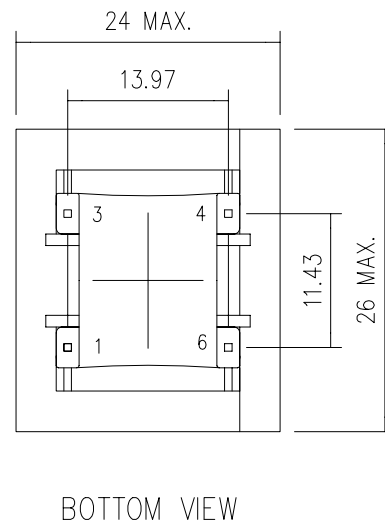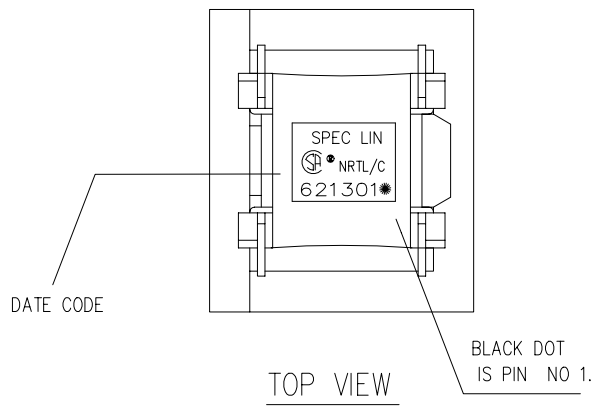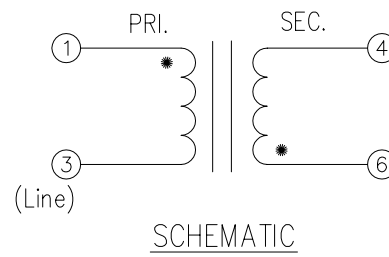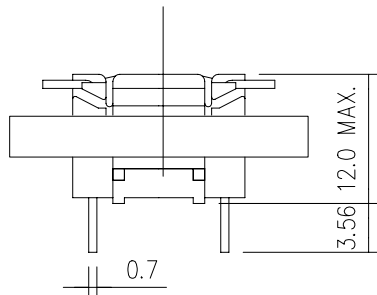

CHECKUP : _____

DESIGN : _____

DRAWER : _____

SPEC LIN ENTERPRISE CO. LTD.
 2F, No.6. ALLEY 17, LANE 42, CHUNG HSING N. ST.
 SAN CHUNG CITY, TAIPEI, TAIWAN
 TEL: 886-2-29991394 FAX: 886-2-22781629

DRAWING NO. **621301**

UNITS
mm

SHEET
1 OF 1

