



Part Number SPECLIN


R/S S N 48 --5 / 2 A

- Package A:2*1*0.4
B:2*2*0.4 C:1*1*0.4
- Load : Io: 0<Io<100(A)
100 ≤ Io(mA)
- Output voltage
- Input voltage
12V,24V,48V
- Input range
N:Narrow range
2:1 (9-18),(18-36),(36-72)
W:Wide range
4:1 (18-72)
- Outputs
S : Single
D : Dual
T : Triple
R : Remote
S : SYNC

Characteristics:

- ✧ Input under-voltage protection
- ✧ Input over-voltage protection
- ✧ Output voltage adjustable
- ✧ Output over current protection
- ✧ High efficiency, high density and high reliability
- ✧ Pall application

Mechanical drawing

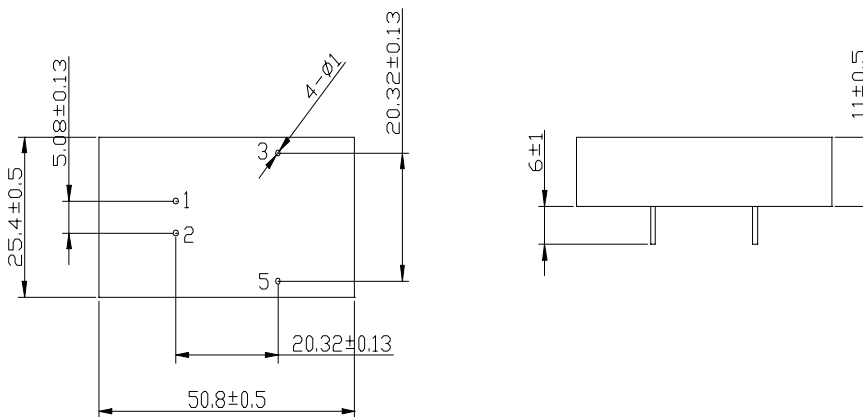

PIN Definition

PIN	1	2	3	4	5
S	+Vin	-Vin	+Vout	No PIN	-Vout
D	+Vin	-Vin	+Vout	COM	-Vout

NOTICE : Without Note Tolerance . ±0.X

15W

SYNC	P/N	Vin range	V ₀ (VDC)	Load _(A)	η (TYPE)
R/S	SN48-3.3/4.25-A	36-72	3.3	4.25	82%
R/S	SN48-5/3-A	36-72	5	3	82%
R/S	SN48-12/1250-A	36-72	12	1250	82%
R/S	SN48-15/1000-A	36-72	15	1000	82%
R/S	SN48-3.3/4.25-A	18-36	3.3	4.25	82%
R/S	SN48-5/3-A	18-36	5	3	82%
R/S	SN48-12/1250-A	18-36	12	1250	82%
R/S	SN48-15/1000-A	18-36	15	1000	82%

Specifications

1	Input voltage range	48:36~72Vdc;24:18~36Vdc;12:9~18Vdc
2	Output voltage accuracy	±1%
3	Line regulation	±0.2% max
4	Load Regulation	±0.5% max
5	Output timing	±10%
6	Over Current Protection Point	120%-150%
7	Efficiency	82%
8	Switching Frequency	300KHz
9	Isolation voltage	1500Vdc
10	Temperature Coefficient	±0.02%/°C
11	Storing Temperature	-40°C--105°C
12	Operating Temperature	-25°C--85°C
13	Weight	18g
14	Relative Humidity	10%--90%

